

## Thyristor/Diode Modules

**V<sub>RRM</sub> / V<sub>DRM</sub>** 800 to 1800V  
**I<sub>FAV</sub> / I<sub>TAV</sub>** 200A

### Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control

### Features

- International standard package
- High Surge Capability
- Glass passivated chip
- Simple Mounting
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- UL recognized applied for file no. E360040

### Module Type

TYPE	V <sub>RRM/V<sub>DRM</sub></sub>	V <sub>RSM</sub>
MT200CB08T2	800V	900V
MT200CB12T2	1200V	1300V
MT200CB16T2	1600V	1700V
MT200CB18T2	1800V	1900V

### ◆Diode

### Maximum Ratings

Symbol	Item	Conditions	Values	Units
I <sub>D</sub>	Output Current(D.C.)	T <sub>c</sub> =85°C	200	A
I <sub>FSM</sub>	Surge forward current	t=10mS T <sub>vj</sub> =45°C	6800	A
i <sup>2</sup> t	Circuit Fusing Consideration		231200	A <sup>2</sup> s
V <sub>Isol</sub>	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1min	3000	V
T <sub>vj</sub>	Operating Junction Temperature		-40 to +125	°C
T <sub>stg</sub>	Storage Temperature		-40 to +125	°C
M <sub>t</sub>	Mounting Torque	To terminals(M6)	3±15%	Nm
M <sub>s</sub>		To heat sink(M6)	5±15%	Nm
Weight	Module (Approximately)		165	g

### Thermal Characteristics

Symbol	Item	Conditions	Values	Units
R <sub>th(j-c)</sub>	Thermal Impedance, max.	Junction to Case	0.08	°C/W
R <sub>th(c-s)</sub>	Thermal Impedance, max.	Case to Heat sink	0.05	°C/W

### Electrical Characteristics

Symbol	Item	Conditions	Values			Units
			Min.	Typ.	Max.	
V <sub>FM</sub>	Forward Voltage Drop, max.	T=25°C IF =620A			1.70	V
I <sub>RRM</sub>	Repetitive Peak Reverse Current, max.	T <sub>vj</sub> =25°C V <sub>RD</sub> =V <sub>RRM</sub> T <sub>vj</sub> =125°C V <sub>RD</sub> =V <sub>RRM</sub>	≤0.5 ≤9			mA mA



## ◆Thyristor

## Maximum Ratings

Symbol	Item	Conditions	Values	Units
I <sub>TAV</sub>	Average On-State Current	Sine 180°; T <sub>c</sub> =85°C	200	A
I <sub>TSM</sub>	Surge On-State Current	T <sub>VJ</sub> =45°C t=10ms, sine T <sub>VJ</sub> =125°C t=10ms, sine	5500 5000	A
i <sup>2</sup> t	Circuit Fusing Consideration	T <sub>VJ</sub> =45°C t=10ms, sine T <sub>VJ</sub> =125°C t=10ms, sine	151000 125000	A2s
Visol	Isolation Breakdown Voltage(R.M.S)	a.c.50HZ;r.m.s.;1min	3000	V
T <sub>VJ</sub>	Operating Junction Temperature		-40 to +125	°C
T <sub>STG</sub>	Storage Temperature		-40 to +125	°C
M <sub>T</sub>	Mounting Torque	To terminals(M6)	3±15%	Nm
M <sub>s</sub>		To heat sink(M6)	5±15%	Nm
di/dt	Critical Rate of Rise of On-State Current	T <sub>VJ</sub> = T <sub>VJM</sub> , 2/3V <sub>DRM</sub> , I <sub>G</sub> =500mA Tr<0.5us, tp>6us	200	A/us
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	T <sub>J</sub> =T <sub>VJM</sub> , 2/3V <sub>DRM</sub> linear voltage rise	1000	V/us
a	Maximum allowable acceleration		50	m/s <sup>2</sup>

## Thermal Characteristics

Symbol	Item	Conditions	Values	Units
R <sub>th(j-c)</sub>	Thermal Impedance, max.	Junction to Case	0.16	°C/W
R <sub>th(c-s)</sub>	Thermal Impedance, max.	Case to Heat sink	0.10	°C/W

## Electrical Characteristics

Symbol	Item	Conditions	Values			Units
			Min.	Typ.	Max.	
V <sub>TM</sub>	Peak On-State Voltage, max.	T=25°C I <sub>T</sub> =620A			1.70	V
I <sub>RRM</sub> /I <sub>DRM</sub>	Repetitive Peak Reverse Current, max. / Repetitive Peak Off-State Current, max.	T <sub>VJ</sub> =T <sub>VJM</sub> , V <sub>R</sub> =V <sub>RRM</sub> , V <sub>D</sub> =V <sub>DRM</sub>			40	mA
V <sub>TO</sub>	On state threshold voltage	For power-loss calculations only (T <sub>VJ</sub> =125°C)			0.85	V
r <sub>T</sub>	Value of on-state slope resistance, max	T <sub>VJ</sub> =T <sub>VJM</sub>			1.5	mΩ
V <sub>GT</sub>	Gate Trigger Voltage, max.	T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V			3	V
I <sub>GT</sub>	Gate Trigger Current, max.	T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V			200	mA
V <sub>GD</sub>	Non-triggering gate voltage, max.	T <sub>VJ</sub> =125°C, V <sub>D</sub> =2/3V <sub>DRM</sub>			0.25	V
I <sub>GD</sub>	Non-triggering gate current, max.	T <sub>VJ</sub> =125°C, V <sub>D</sub> =2/3V <sub>DRM</sub>			10	mA
I <sub>L</sub>	Latching current, max.	T <sub>VJ</sub> =25°C, R <sub>G</sub> =33 Ω		300	1000	mA
I <sub>H</sub>	Holding current, max.	T <sub>VJ</sub> =25°C, V <sub>D</sub> =6V		150	400	mA
t <sub>gd</sub>	Gate controlled delay time	T <sub>VJ</sub> =25°C, I <sub>G</sub> =1A, di <sub>G</sub> /dt=1A/us			1	us
t <sub>q</sub>	Circuit commutated turn-off time	T <sub>VJ</sub> =T <sub>VJM</sub>			100	us

## Performance Curves

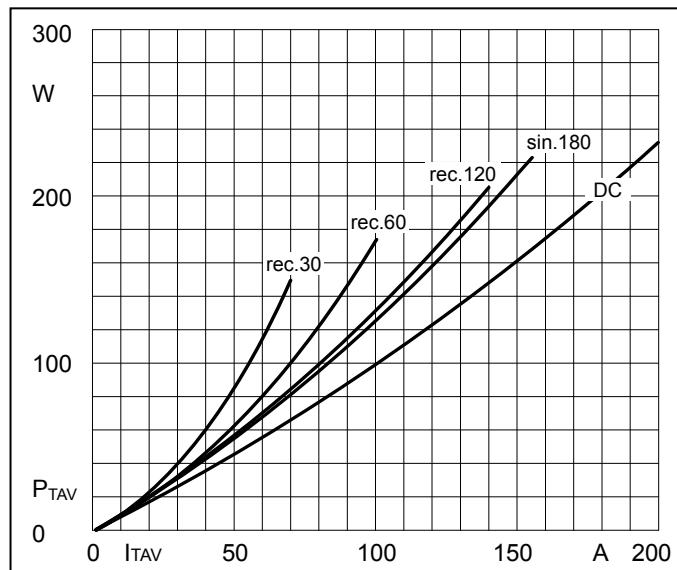


Fig1. Power dissipation

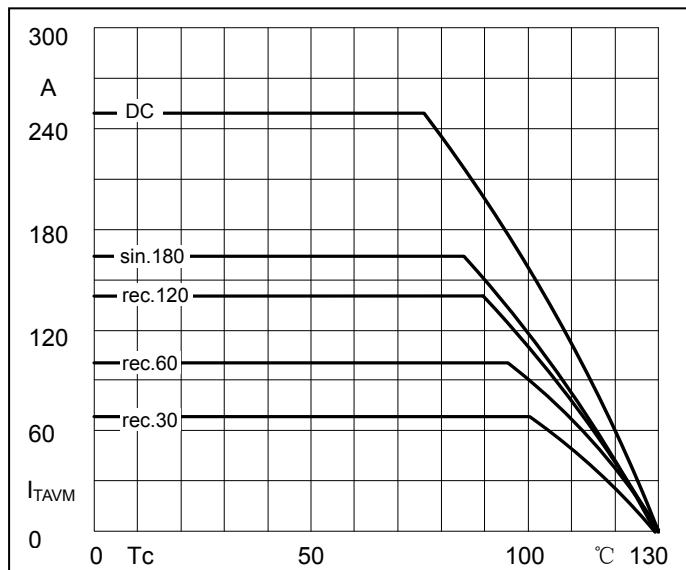


Fig2. Forward Current Derating Curve

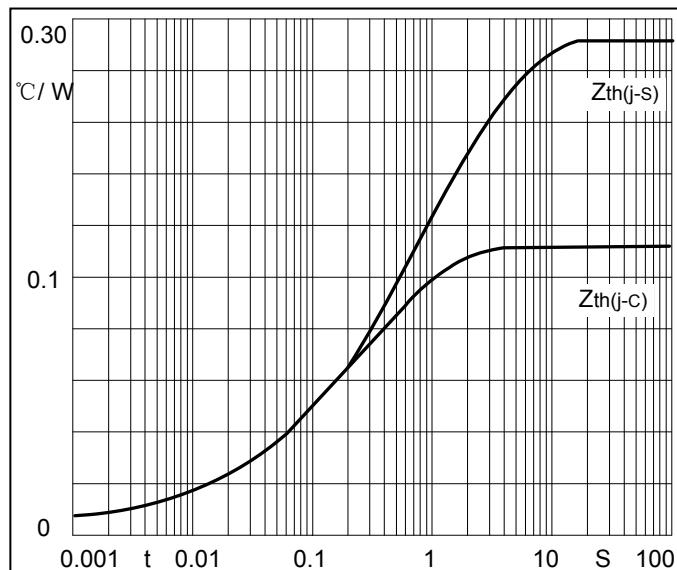


Fig3. Transient thermal impedance

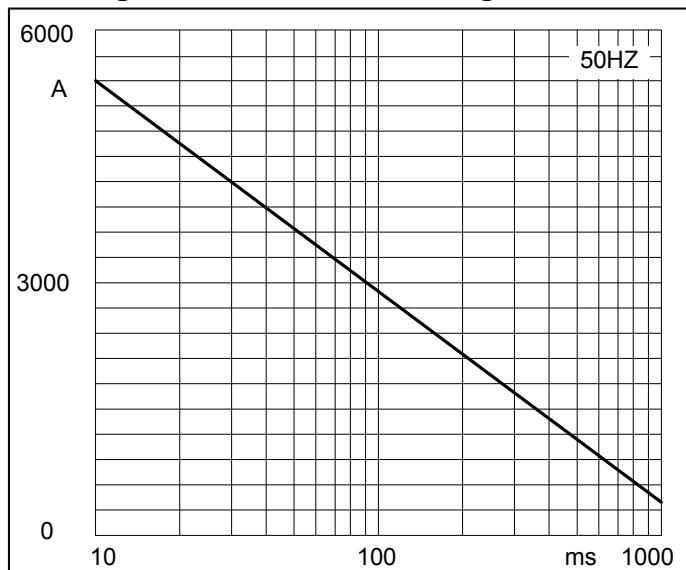


Fig4. Max Non-Repetitive Forward Surge Current

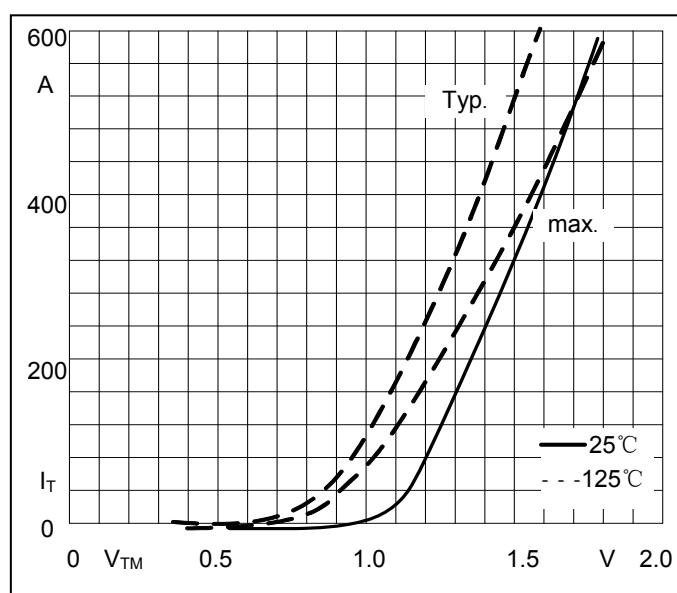


Fig5. Forward Characteristics


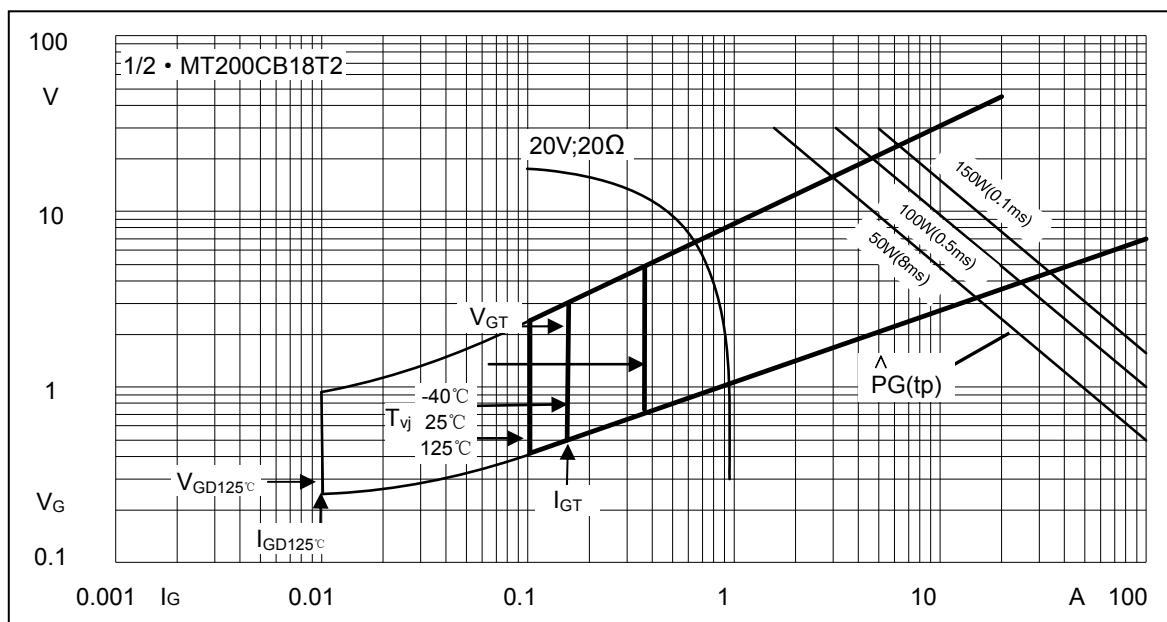


Fig6. Gate trigger Characteristics

## Package Outline Information

### CASE: T2

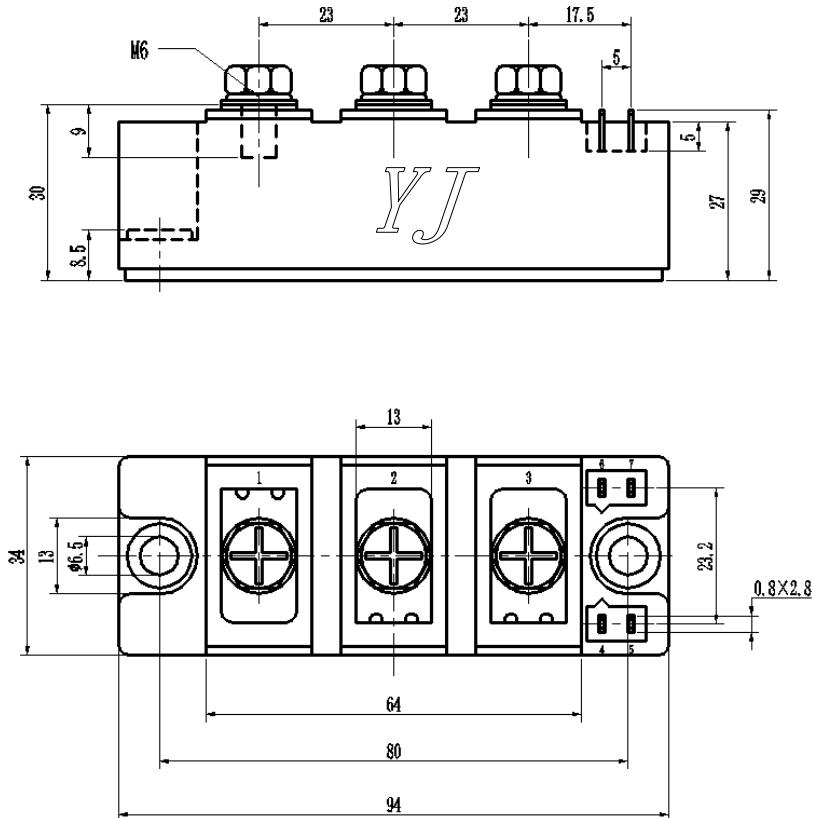

Dimensions in mm