



KK330-FAST SWITCHING THYRISTOR

1600 V_{DRM}

HIGH POWER THYRISTOR FOR INVERTER APPLICATION

Features:

- . All Diffused Structure
- . Amplifying Gate Configuration
- . Blocking capability up to 1600 volts
- . High dv/dt Capability
- . Pressure Assembled Device

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking - Off State


Device Type	V _{RRM} (1)	V _{DRM} (1)	V _{RSM} (1)
KK330/16	1600	1600	1800

V_{RRM} = Repetitive peak reverse voltage

V_{DRM} = Repetitive peak off state voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage and off state leakage	I _{RRM} /I _{DRM}	3 mA 50 mA (3)
Critical rate of voltage rise	dv/dt (4)	1000 V/μs

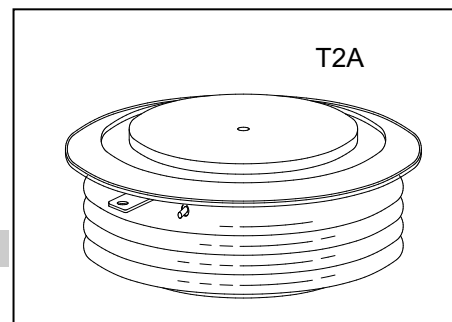

Notes:

All ratings are specified for T_j=25 °C unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to +125 °C

(2) 10 msec. Max. Pulse width

(3) Maximum value for T_j=125 °C.

(4) Minimum value for linear and exponential waveshape to 67% rated V_{DRM}. Gate open, T_j=125 °C

(5) The value of di/dt is established in accordance with JB/T4193-2013.

Conducting - On State

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average value of on-state current	I _{T(AV)}		330		A	Sinewave, 180° conduction, T _c =55°C
RMS value of on-state current	I _{TRMS}		518		A	Nominal value
Peak one cycle surge (non repetitive) current	I _{TSM}		4300		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j = 125 °C
I square t	I ² t		9.2x10 ⁴		A ² s	10 msec
Latching current	I _L		1000		mA	V _D =12V; R _L =12ohms
Holding current	I _H		400		mA	V _D =12V; I=2.5A
Peak on-state voltage	V _{TM}		2.9		V	I _{TM} = 900A; T _j =25°C; FN=7KN
Threshold voltage, low-level	V _{TO}		1.60		V	T _j =125°C
Slope resistance, low-level	r _T		1.32		mΩ	300A to 1800A
Critical rate of rise of on-state current(5)	di/dt		200		A/μs	T _j =125°C; V _D = 0.67 V _{DRM} ; f=50Hz; I _{TM} =500A

ELECTRICAL CHARACTERISTICS AND RATINGS KK330-FAST SWITCHING THYRISTOR**Gating**

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Peak gate power dissipation	P_{GM}		20		W	
Average gate power dissipation	$P_{G(AV)}$		4		W	
Gate-trigger current	I_{GT}	40	250		mA	$V_D=12V; R_L=3ohms; T_j=+25^{\circ}C$
Gate- trigger voltage	V_{GT}	0.90	2.5		V	$V_D=12V; R_L=3ohms; T_j=+25^{\circ}C$
Peak negative voltage	V_{GRM}		5		V	

Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Delay time	t_d		3.0	2.5	μs	$I_{TM}=500A; V_D=67\%V_{DRM}$ Gate pulse: $V_G=30V; R_G=10ohms;$ $t_r=0.1\mu s; t_p=20\mu s$
Turn-off time (with $V_R = -5 V$)	t_q		25		μs	$I_{TM}=900 A; di/dt = -20 A/\mu s; t_p=1000\mu s$ $V_R=50 V; dv/dt=30V/\mu s;$ $V_D= 67\%V_{DRM}; T_j=125^{\circ}C$
Reverse recovery charge	Q_{rr}				μC	$I_{TM}=500 A; di/dt=-10A/\mu s;$ $V_R=50 V; T_j=125^{\circ}C$

THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+125		$^{\circ}C$	
Storage temperature	T_{stg}	-40	+140		$^{\circ}C$	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.054		$^{\circ}C/W$	Double sided cooled
Thermal resistance - case to heatsink	$R_{\Theta(c-s)}$		0.01		$^{\circ}C/W$	Double sided cooled
Mounting force	F	9	11	10	kN	
Weight	m			0.08	kg	

* Mounting surfaces smooth, flat and greased

