


Low VF Bridge Rectifiers

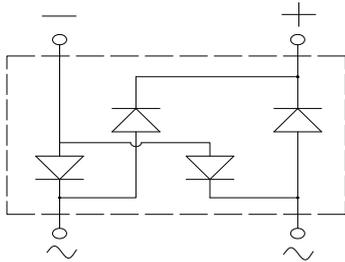

Features

- UL recognition, file #E313149
- Glass passivated chip junction
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** YBS6
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	YBSNL15008A
Device marking code			YBSNL15008A
Maximum Repetitive Peak Reverse Voltage	VRRM	V	800
Maximum RMS Voltage	VRMS	V	560
Maximum DC blocking Voltage	VDC	V	800
Average rectified output current @60Hz sine wave, R-load, Tc=95°C	Io	A	15
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Tj=25°C	IFSM	A	400
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25°C			800
Current squared time @1ms≤t≤8.3ms Tj=25°C, Rating of per diode	I²t	A²s	664
Storage temperature	Tstg	°C	-55 ~ +150
Junction temperature	Tj	°C	-55 ~ +150

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	YBSNL15008A
Maximum instantaneous forward voltage drop per diode	VF	V	IFM=7.5A	0.92
Maximum DC reverse current at rated DC blocking voltage per diode	IR	µA	Tj=25°C	5
			Tj=125°C	100
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	120



YBSNL15008A

■ Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	YBSNL15008A
Typical Thermal Resistance	Between Junction and Ambient	R _{θJA}	°C/W	50
	Between Junction and Lead	R _{θJL}		10
	Between Junction and Case	R _{θJC}		2

Note: Thermal Resistance mounted on P.C.B with 30mm*15mm*1.6mm

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YBSNL15008A	F1	Approximate 0.96	1500	/	21000	13" Reel

■ Characteristics (Typical)

FIG1: I_o-T_c Curve

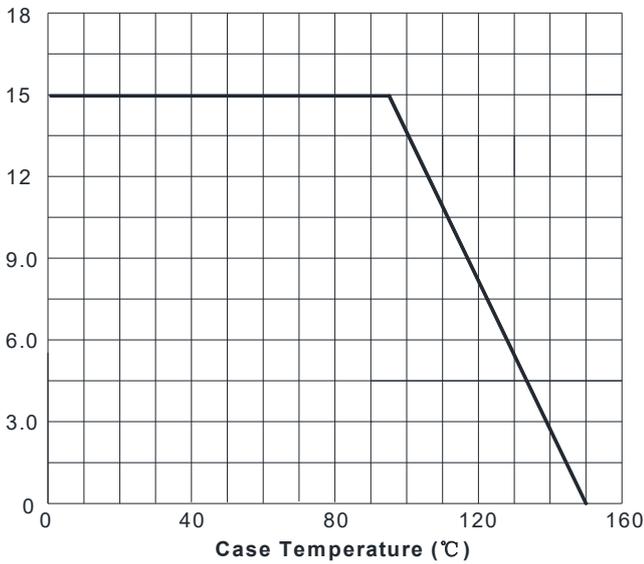


FIG2: Surge Forward Current Capability

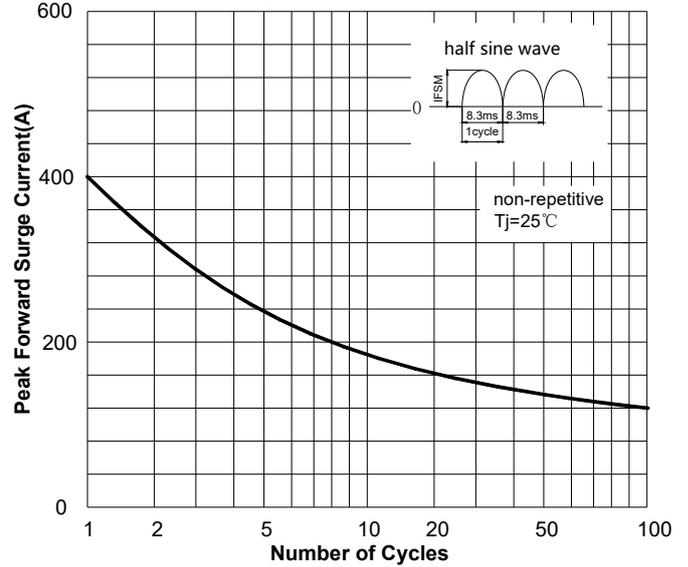


FIG3: Typical Forward Voltage


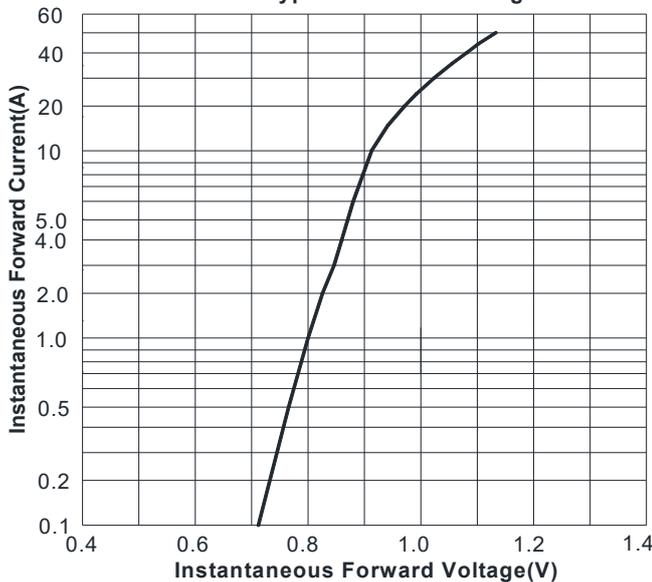



FIG4: Typical Reverse Characteristics



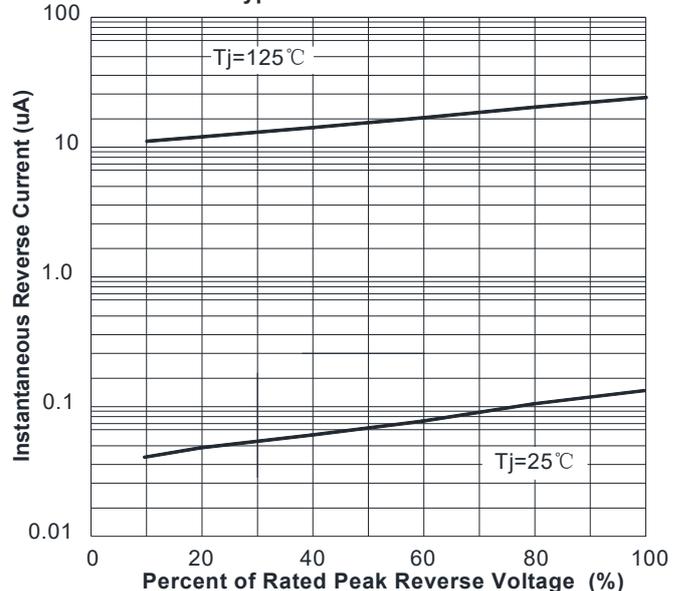


YBSNL15008A

■ Outline Dimensions

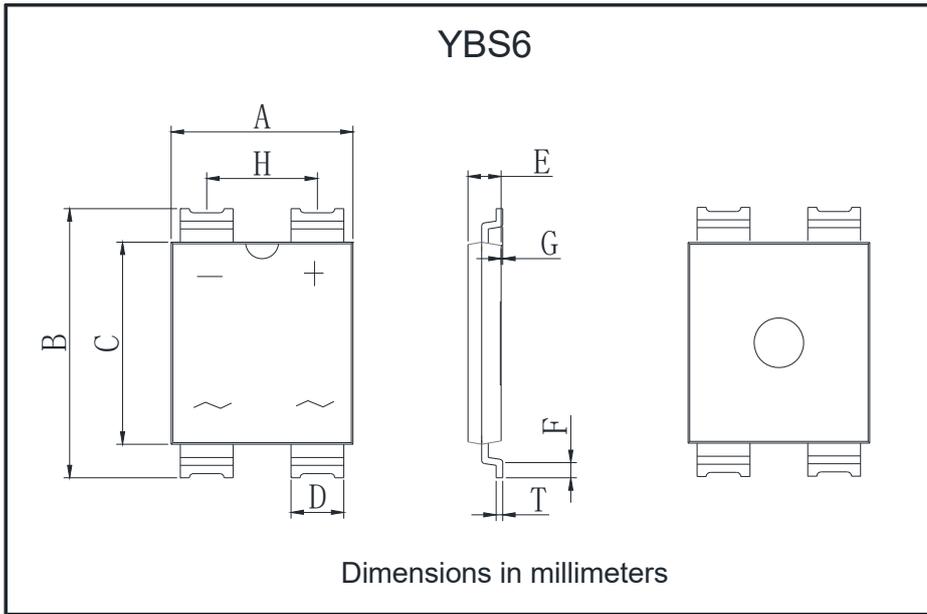

YBS6		
Dim	Min	Max
A	10.70	11.30
B	15.85	16.65
C	11.70	12.30
D	3.05	3.35
E	1.80	2.20
F	0.70	1.10
G	0	0.20
H	6.55	6.85
T	0.35	0.55

■ Suggested pad layout

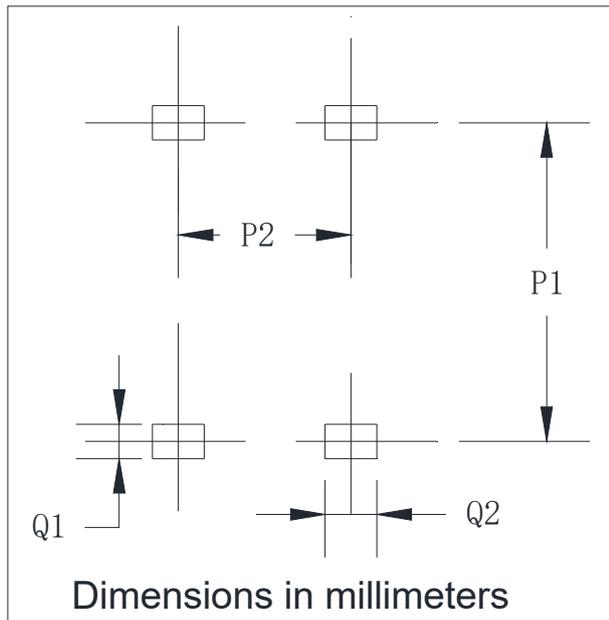

YBS6	
Dim	Min
P1	15.50
P2	6.70
Q1	1.00
Q2	3.20



YBSNL15008A

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.