





# **Fast Recovery Bridge Rectifiers**





#### **Features**

- UL recognition, file #E313149
- Glass passivated chip junction
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

#### **Typical Applications**

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

#### **Mechanical Data**

• Package: YBS3

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free

• Terminals: Tin plated leads, solderable per

J-STD-002 and JESD22-B102
• Polarity: As marked on body

### ■Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	RYBSM6010
Device marking code			RYBSM6010
Maximum Repetitive Peak Reverse Voltage	VRRM	V	1000
Maximum RMS Voltage	VRMS	V	700
Maximum DC blocking Voltage	VDC	V	1000
Average rectified output current @60Hz sine wave, R-load, Tc=60°C	IO	Α	6.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25°C	IFOLI	А	150
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25°C	IFSM		300
Current squared time @1ms≤t≤8.3ms Tj=25°C,Rating of per diode	l²t	A <sup>2</sup> s	93.4
Storage temperature	T <sub>stg</sub>	°C	-55 ~ +150
Junction temperature	Тj	°C	-55 ~ +150

# **■Electrical Characteristics** (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	RYBSM6010
Maximum reverse recovery time	t <sub>rr</sub>	ns	I <sub>F</sub> =0.5A,I <sub>R</sub> =1.0A, I <sub>n</sub> =0.25A	500
Maximum instantaneous forward voltage drop per diode	VF	>	IFM=3.0A	1.3
Maximum DC reverse current at rated DC blocking voltage per diode	IR	μА	T <sub>j</sub> =25°C	5
	'IK		T <sub>j</sub> =125°C	100
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	56



# **RYBSM6010**

### **■Thermal Characteristics** $(T_a=25 \degree C \text{ Unless otherwise specified})$


	PARAMETER	SYMBOL	UNIT	RYBSM6010
	Between Junction and Ambient	$R_{\theta J\text{-}A}$		55
Typical Thermal Resistance	Between Junction and Lead	$R_{\theta J\text{-}L}$	°C/W	14
	Between Junction and Case	R <sub>θJ-C</sub>		8


Note: Device mounted on P.C.B with 35mm\*25mm\*1.7mm.


**■Ordering Information** (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
RYBSM6010	F1	Approximate 0.36	1800	3600	25200	13" Reel

#### ■ Characteristics(Typical)

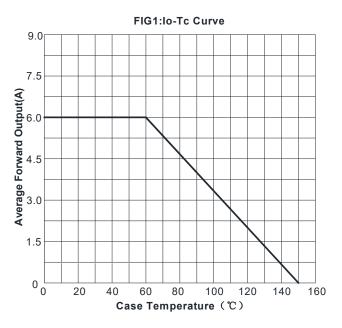

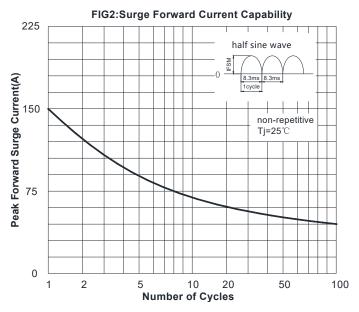

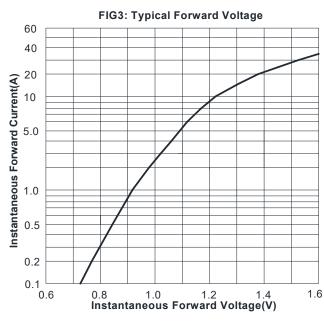

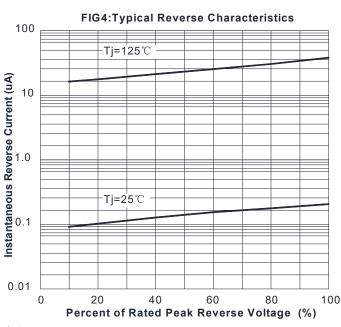




10 Ω NONINDUCTIVE  $\mathbf{50}~\Omega$ trr NONINDUCTIVE +0.5A **≠** DUT 0 PULSE GENERATOR -0.25A (NOTE2) OSCILLOSCOPE \$1 Ω NONINDUCTIVE (NOTE1) NOTES: 1.Rise Time=7ns max .Inpot Impedance=1M  $\Omega$  22pf 2.Rise Time=10ns max.Sourse Impedance=50  $\Omega$ -1.0A SET TIME BASE FOR 5/10ns/cm


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

#### **■ Outline Dimensions**

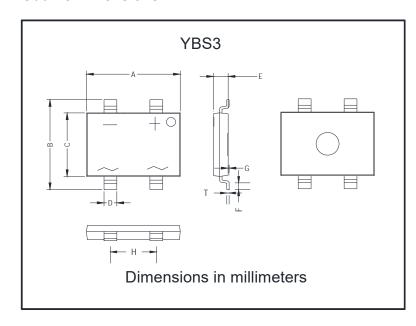

YBS3				
Dim	Min	Max		
Α	10.00	10.40		
В	9.70	10.10		
С	6.80	7.20		
D	1.3	1.5		
E	1.4	1.8		
F	0.5	1.1		
G	0	0.15		
Н	4.9	5.1		
Т	0.20	0.30		

### ■ Suggested pad layout

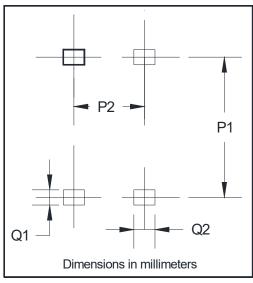

YBS3		
Dim	Min	
P1	9.25	
P2	5.00	
Q1	1.00	
Q2	1.5	

3/4



### **RYBSM6010**

#### **Disclaimer**

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// <a href="http://www.21yangjie.com">www.21yangjie.com</a>, or consult your nearest Yangjie's sales office for further assistance.