






N-Channel and N-Channel Complementary MOSFET



PDFN5060-8L



Product Summary

- V_{DS} 60V
- I_D 48A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<11m\Omega$
- $R_{DS(ON)}$ (at $V_{GS}=4.5V$) $<16m\Omega$
- 100% EAS Tested
- 100% ∇V_{DS} Tested

General Description

- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

Applications

- Engine management systems
- Body control electronics
- DC-DC convertor

■ Absolute Maximum Ratings ($T_J=25^\circ C$ unless otherwise noted)

Parameter			Symbol	Limit	Unit	
Drain-source Voltage			V_{DS}	60	V	
Gate-source Voltage			V_{GS}	± 20	V	
Continuous Drain Current (Note 1,2)	Steady-State	$T_A=25^\circ C$	I_D	10	A	
Continuous Drain Current (Note 1,3)		$T_A=100^\circ C$		6		
Pulsed Drain Current	Steady-State	$T_C=25^\circ C$	I_{DM}	48	A	
Avalanche energy		$T_C=100^\circ C$		30		
Total Power Dissipation (Note 1,2)	Steady-State	$T_A=25^\circ C$	P_D	2	W	
Total Power Dissipation (Note 1,3)		$T_A=100^\circ C$		0.8		
Junction and Storage Temperature Range	$T_C=25^\circ C$, $t_p=100\mu s$			44		
	$T_C=100^\circ C$			17		
T_J, T_{STG}				-55~+150	°C	

■ Thermal resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient (Note 2)	Steady-State	$R_{\theta JA}$	50	60	°C/W
Thermal Resistance Junction-to-Case	Steady-State	$R_{\theta JC}$	2.3	2.8	

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJGD011G06A	F1	YJGD011G06A	5000	10000	100000	13" reel



YJGD011G06A

■ Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	60	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	μA
		$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}, T_J=150^\circ\text{C}$	-	-	100	
Gate-Body Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1.3	1.8	2.4	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=20\text{A}$	-	8.6	11	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=15\text{A}$	-	11.9	16	$\text{m}\Omega$
Diode Forward Voltage	V_{SD}	$I_{\text{S}}=20\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.2	V
Gate resistance	R_{G}	$f=1\text{MHz}$	-	2.2	-	Ω
Maximum Body-Diode Continuous Current	I_{S}		-	-	48	A
Dynamic Parameters						
Input Capacitance	C_{iss}	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	-	880	-	pF
Output Capacitance	C_{oss}		-	320	-	
Reverse Transfer Capacitance	C_{rss}		-	15.7	-	
Switching Parameters						
Total Gate Charge	Q_{g}	$V_{\text{GS}}=10\text{V}, V_{\text{DS}}=30\text{V}, I_{\text{D}}=23\text{A}$	-	15.2	-	nC
Gate-Source Charge	Q_{gs}		-	3.2	-	
Gate-Drain Charge	Q_{gd}		-	3.4	-	
Reverse Recovery Charge	Q_{rr}	$I_{\text{F}}=23\text{A}, \text{di/dt}=100\text{A/us}$	-	9	-	nC
Reverse Recovery Time	t_{rr}		-	17.3	-	ns
Turn-on Delay Time	$t_{\text{D}(\text{on})}$	$V_{\text{GS}}=10\text{V}, V_{\text{DD}}=30\text{V}, I_{\text{D}}=23\text{A}$ $R_{\text{GEN}}=2.7\Omega$	-	9	-	ns
Turn-on Rise Time	t_{r}		-	51	-	
Turn-off Delay Time	$t_{\text{D}(\text{off})}$		-	20	-	
Turn-off fall Time	t_{f}		-	6	-	

Note:

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- The value of R_{thJA} is measured with the device mounted on the 40mm*40mm*1.1mm single layer FR-4 PCB board with 1 in² pad of 2oz. Copper, in the still air environment with $T_A = 25^\circ\text{C}$. The maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.
- Thermal resistance from junction to soldering point (on the exposed drain pad).

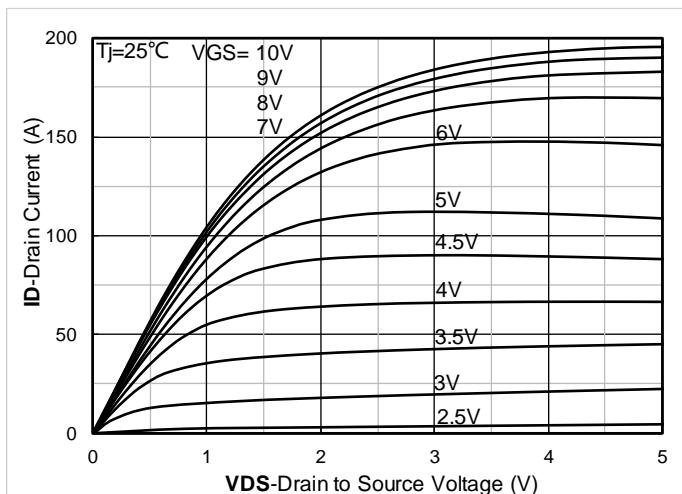
**■Typical Electrical and Thermal Characteristics Diagrams**

Figure 1. Output Characteristics

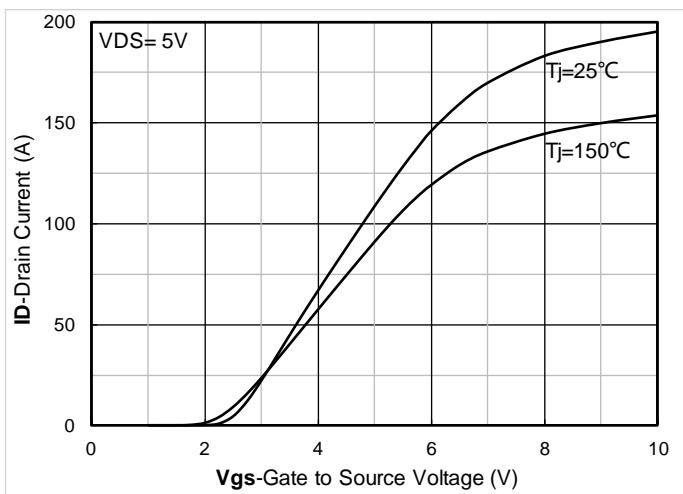


Figure 2. Transfer Characteristics

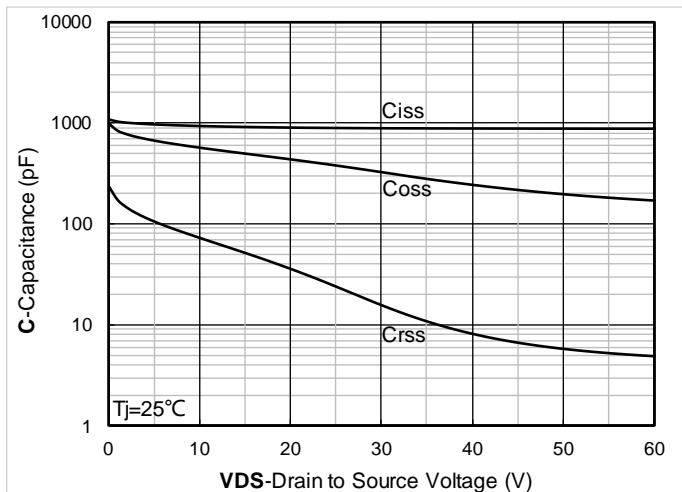


Figure 3. Capacitance Characteristics

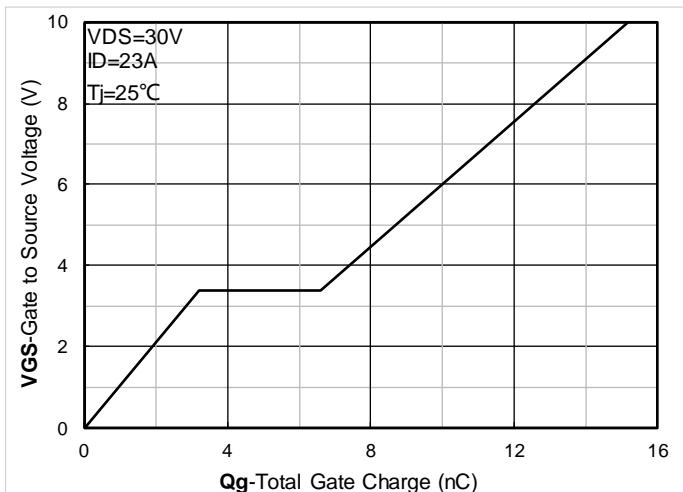


Figure 4. Gate Charge

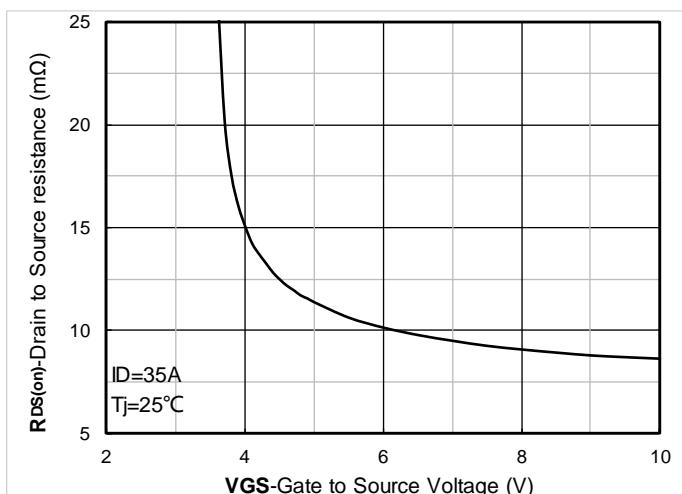


Figure 5. On-Resistance vs Gate to Source Voltage

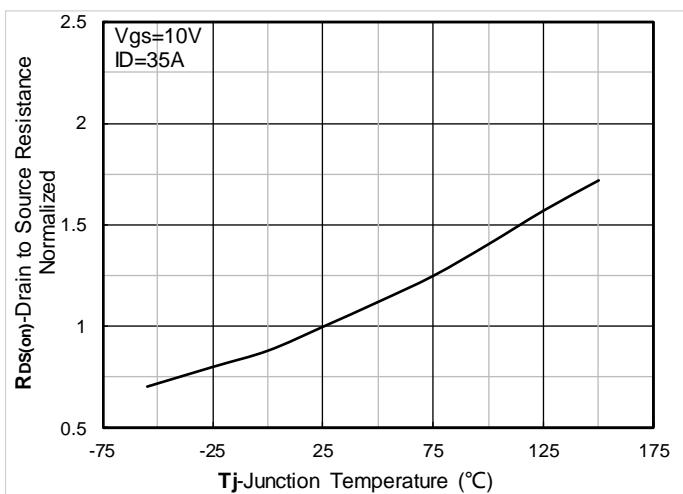


Figure 6. Normalized On-Resistance



YJGD011G06A

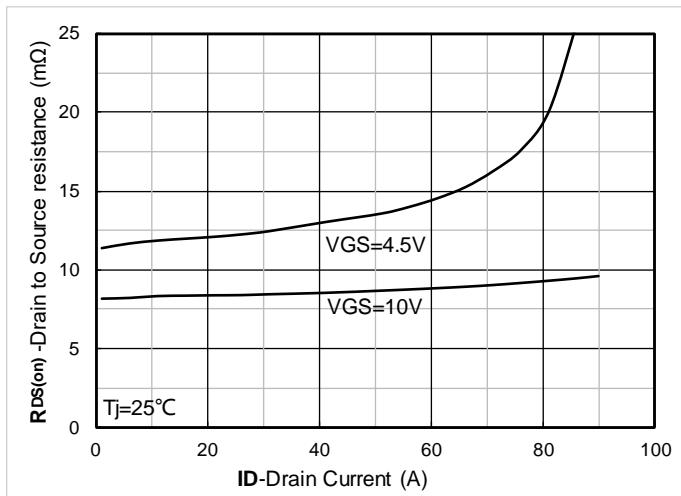


Figure 7. $R_{DS(on)}$ VS Drain Current

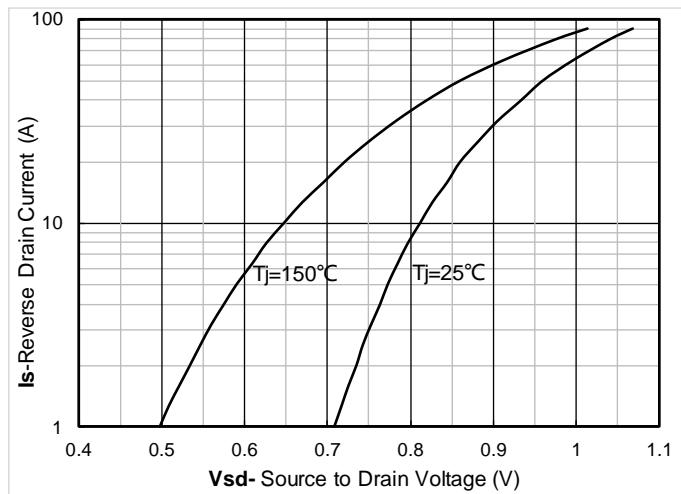


Figure 8. Forward characteristics of reverse diode

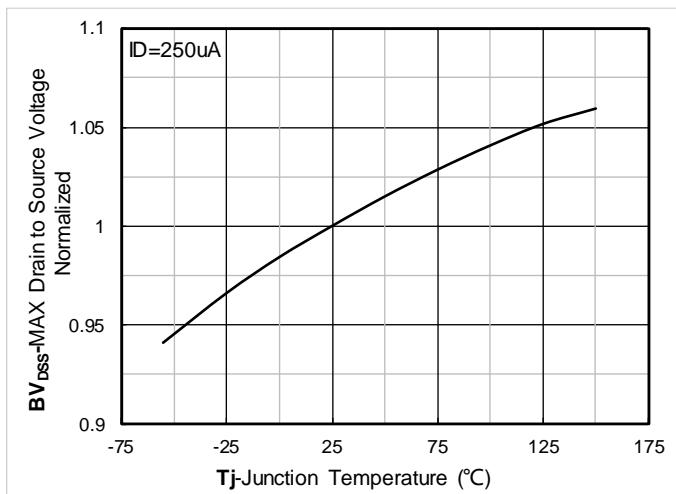


Figure 9. Normalized breakdown voltage

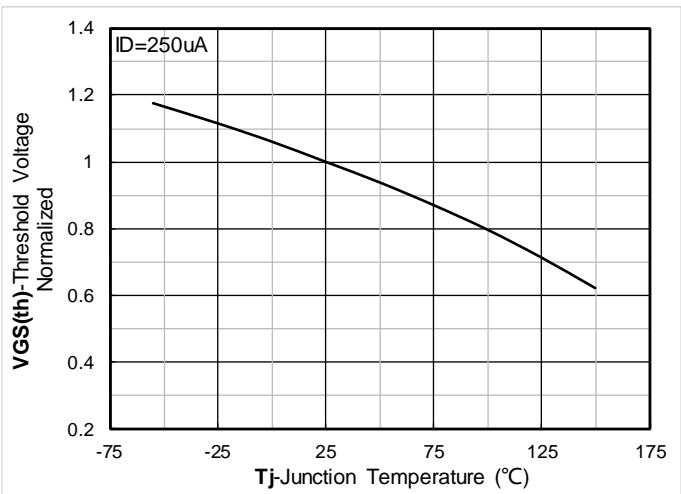


Figure 10. Normalized Threshold voltage

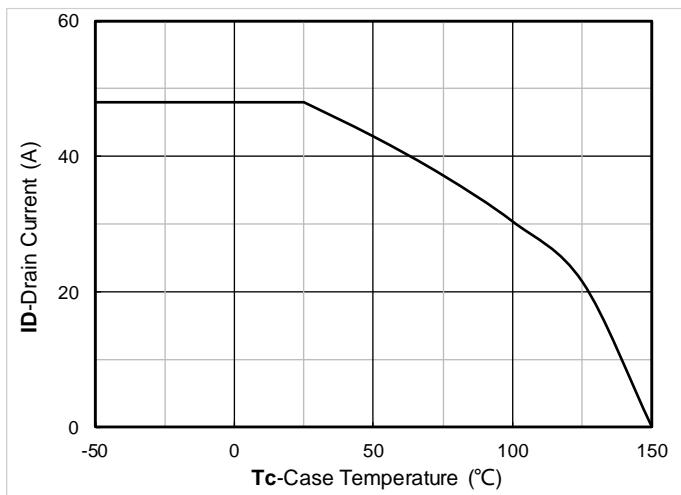


Figure 11. Current dissipation

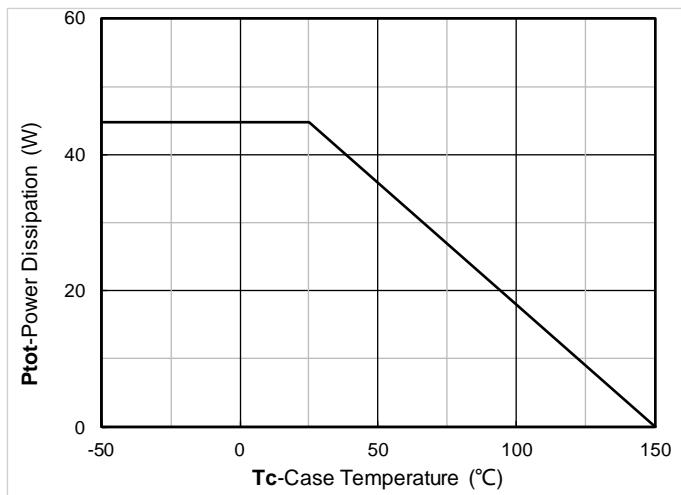


Figure 12. Power dissipation

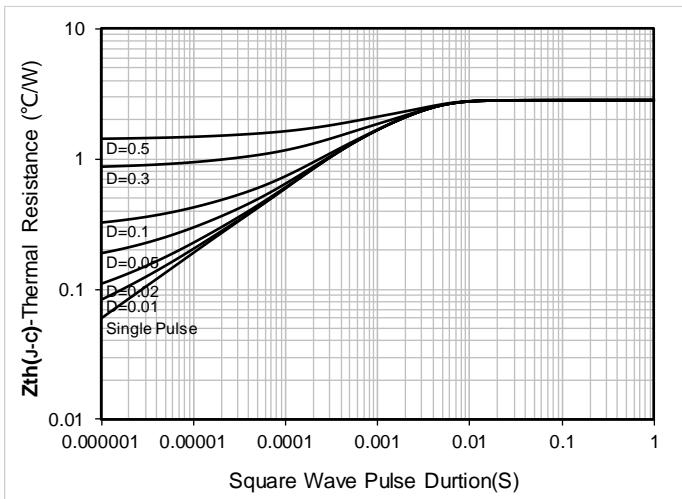


Figure 13. Maximum Transient Thermal Impedance

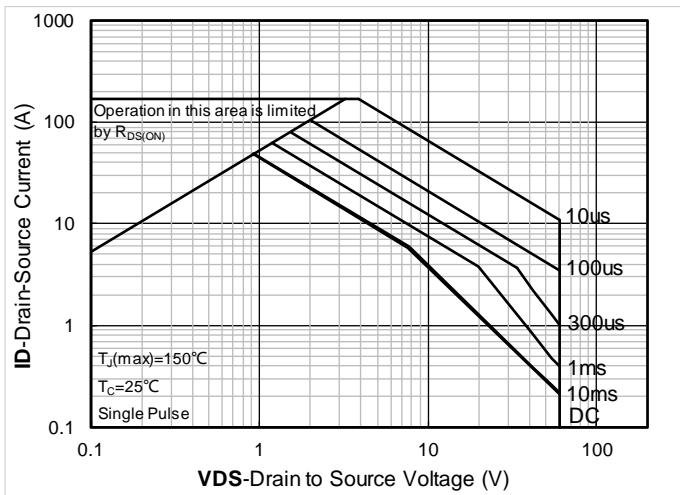


Figure 14. Safe Operation Area

■ Test Circuits & Waveforms

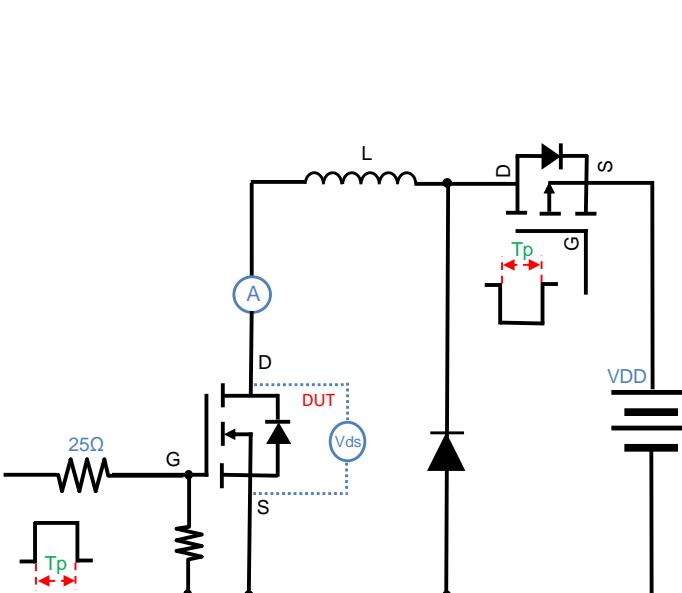


Figure A. Unclamped Inductive Switching (UIS) Test Circuit & Waveform

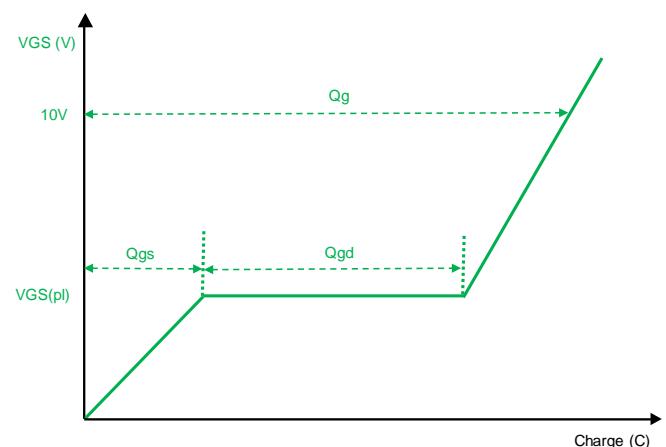
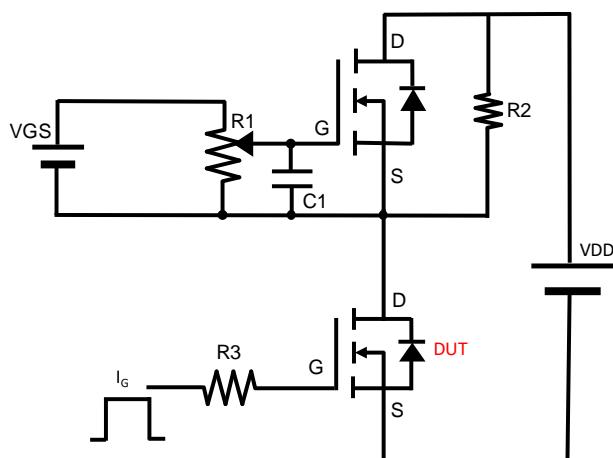


Figure B. Gate Charge Test Circuit & Waveform

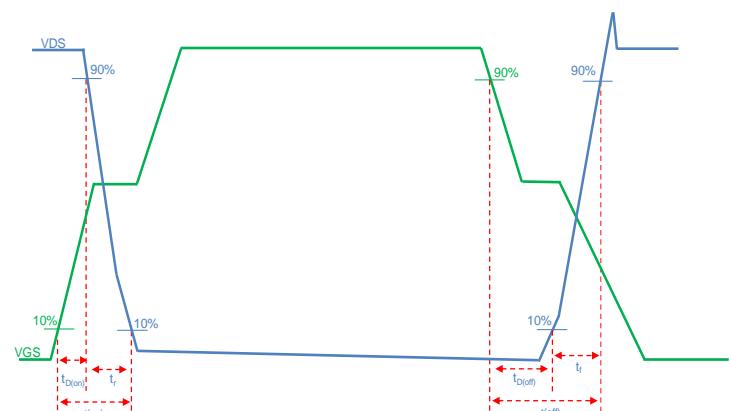
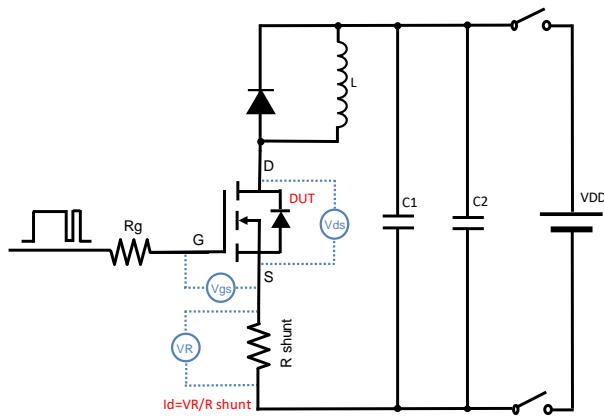


Figure C. Resistive Switching Test Circuit & Waveform





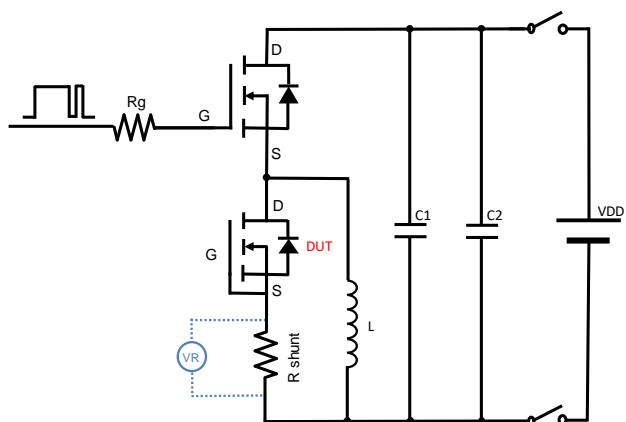


Figure D. Diode Recovery Test Circuit & Waveform

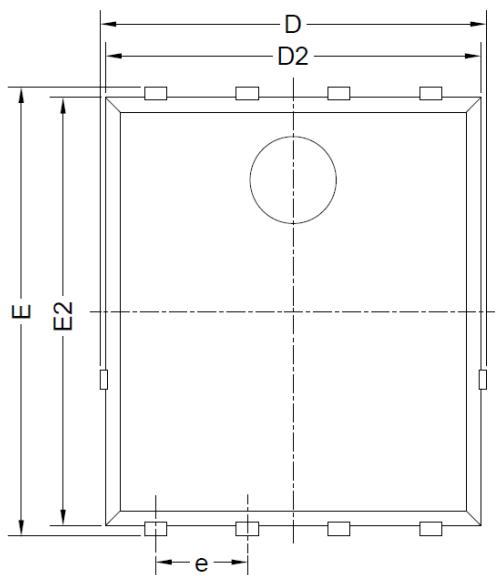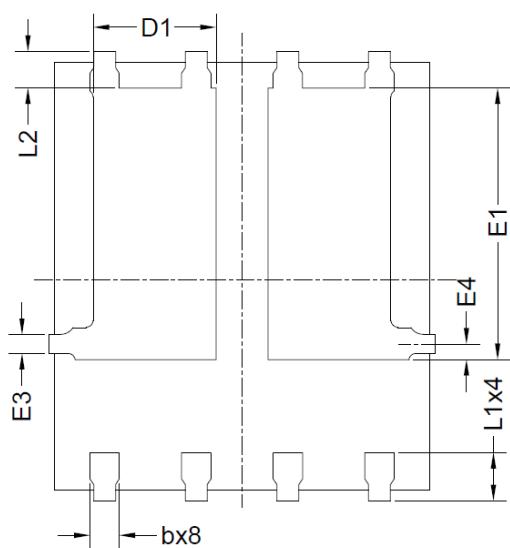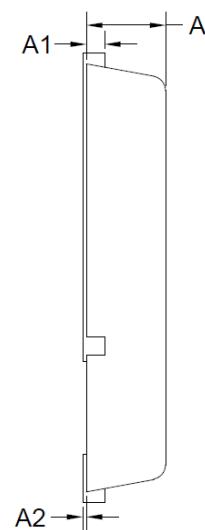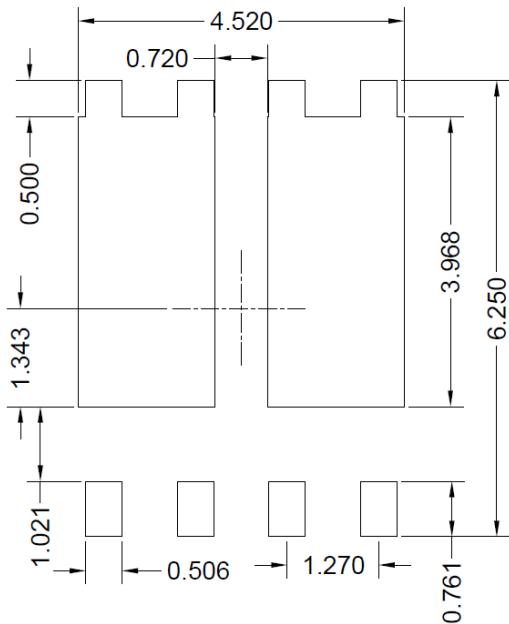

■ PDFN5060-8L-E-1.1mm Package information

Top View
正面视图Bottom View
背面视图Side View
侧面视图Suggested Solder Pad Layout
Top View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.15	6.35
A	1.00	1.10	1.20
A1	0.254 BSC		
A2			0.10
D1	1.50	1.70	1.90
E1	3.52	3.72	3.92
D2	5.00	5.20	5.40
E2	5.66	5.86	6.06
E3	0.254REF		
E4	0.21REF		
L1	0.56	0.66	0.76
L2	0.50 BSC		
b	0.31	0.41	0.51
e	1.27 BSC		

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.10\text{mm}$.
3. The pad layout is for reference purposes only.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use or sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.